

# BATTERY SPECIFICATIONS

## Premium AGM Factory Activated

12 VOLT

Battery Type	Capacity AH (10HR)	Dimensions -Inches- L/W/H	Dimensions -Millimeters- L/W/H	Assembly Figure (As per cover polarity)	Weight Lbs.	Weight Kgs.	Terminal Type- see pg. 4	Acid Volume (Ozs.)	Acid Volume (Liters)	Regular Charge Current (amps)	CCA @0°F (-18°C)
GT7-B4	6.5	5 <sup>7/8</sup> /2 <sup>9/16</sup> /3 <sup>5/8</sup>	151/66/94		6.0	2.7	4	N/A	N/A	0.6	110
GT9-B4	8	6 <sup>2</sup> / <sub>2</sub> <sup>3/4</sup> /4 <sup>1/8</sup>	150/70/105		7.5	3.4	4	N/A	N/A	0.8	115
GT12-B4	10	5 <sup>7/8</sup> /2 <sup>11/16</sup> /5 <sup>1/16</sup>	151/70/131		10	4.5	4	N/A	N/A	1.0	180
GT14-B4	12	5 <sup>7/8</sup> /2 <sup>3/4</sup> /5 <sup>11/16</sup>	150/69/145		11	4.9	4	N/A	N/A	1.2	210
GTZ7S	6	4 <sup>7/16</sup> /2 <sup>2/4</sup> /4 <sup>1/8</sup>	113/70/105		4.6	2.1	10	N/A	N/A	0.6	130
GTZ10S	8.6	6 <sup>3</sup> / <sub>7</sub> <sup>1/16</sup> /3 <sup>11/16</sup>	150/87/93		7.0	3.2	4	N/A	N/A	0.9	190
GTZ12S	11	6 <sup>3</sup> / <sub>7</sub> <sup>1/16</sup> /4 <sup>3/8</sup>	150/87/110		8.1	3.7	4	N/A	N/A	1.1	210
GTZ14S	11.2	6 <sup>3</sup> / <sub>7</sub> <sup>1/16</sup> /4 <sup>3/8</sup>	150/87/110		8.6	3.9	4	N/A	N/A	1.1	230
YGIX30	27.5	6 <sup>9</sup> / <sub>16</sub> /5 <sup>6</sup> / <sub>7</sub> <sup>7/8</sup>	166/126/175		22	9.9	10	N/A	N/A	2.8	335

## Premium AGM

12 VOLT

Battery Type	Capacity AH (10HR)	Dimensions -Inches- L/W/H	Dimensions -Millimeters- L/W/H	Assembly Figure (As per cover polarity)	Weight Lbs.	Weight Kgs.	Terminal Type- see pg. 4	Acid Volume (Ozs.)	Acid Volume (Liters)	Regular Charge Current (amps)	CCA @0°F (-18°C)
GTX4L-BS	3	4 <sup>1</sup> / <sub>2</sub> <sup>2</sup> / <sub>13</sub> <sup>1/16</sup> /3 <sup>3</sup> / <sub>8</sub>	114/71/86		2.9	1.3	5	6.1	0.18	0.4	50
GTX5L-BS	4	4 <sup>1</sup> / <sub>2</sub> <sup>2</sup> / <sub>13</sub> <sup>1/16</sup> /4 <sup>3</sup> / <sub>16</sub>	114/71/106		3.5	1.6	5	8.1	0.24	0.5	70
GTX7A-BS	6	6 <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>3</sub> <sup>3</sup> / <sub>4</sub>	150/87/94		5.3	2.4	5	11.1	0.33	0.7	85
GTX7L-BS	6	4 <sup>1</sup> / <sub>2</sub> <sup>2</sup> / <sub>13</sub> <sup>1/16</sup> /5 <sup>3</sup> / <sub>16</sub>	114/71/131		5.1	2.3	5	11.1	0.33	0.6	85
GTX9-BS	8	6 <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>4</sub> <sup>3</sup> / <sub>16</sub>	150/87/105		5.4	2.4	5	13.5	0.40	0.9	120
GTX12-BS	10	6 <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>5</sub> <sup>1</sup> / <sub>8</sub>	150/87/130		7.5	3.4	5	20.2	0.60	1.2	180
GTX14-BS	12	6 <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>5</sub> <sup>3</sup> / <sub>4</sub>	150/87/145		8.1	3.7	5	23.6	0.70	1.4	200
GTX14AH-BS	12	5 <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>8</sub> <sup>1</sup> / <sub>6</sub> <sup>3</sup> / <sub>5</sub>	136/91/168		8.2	3.7	8	23.6	0.70	1.4	190
GTX14AHL-BS	12	5 <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>8</sub> <sup>1</sup> / <sub>6</sub> <sup>3</sup> / <sub>5</sub>	136/91/168		8.2	3.7	8	23.6	0.70	1.4	190
GT16-BS	19	6 <sup>15</sup> / <sub>16</sub> <sup>1</sup> / <sub>4</sub> <sup>1</sup> / <sub>8</sub>	176/101/156		10.3	4.7	4	26.3	0.78	4.7	240
GT16L-BS	19	6 <sup>15</sup> / <sub>16</sub> <sup>1</sup> / <sub>4</sub> <sup>1</sup> / <sub>8</sub>	176/101/156		10.3	5.1	4	26.3	0.78	4.7	240
GTX18L-BS	20	8 <sup>1</sup> / <sub>8</sub> <sup>3</sup> / <sub>8</sub> <sup>1</sup> / <sub>6</sub> <sup>7</sup> / <sub>16</sub>	206/91/164		11.2	5.1	4	31.4	0.93	5.1	250
GTX20-BS <sup>1</sup>	18	6 <sup>7</sup> / <sub>8</sub> <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>6</sub> <sup>1</sup> / <sub>8</sub>	175/87/155		11.2	5.1	4	31.4	0.93	1.8	275
GTX20L-BS <sup>1</sup>	18	6 <sup>7</sup> / <sub>8</sub> <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>6</sub> <sup>1</sup> / <sub>8</sub>	175/87/155		11.2	5.1	4	31.4	0.93	1.8	275

<sup>1</sup> The GTX20 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.

## CB Series

12 VOLT

Battery Type	Capacity AH (10HR)	Dimensions -Inches- L/W/H	Dimensions -Millimeters- L/W/H	Assembly Figure (As per cover polarity)	Weight Lbs.	Weight Kgs.	Terminal Type- see pg. 4	Acid Volume (Ozs.)	Acid Volume (Liters)	Regular Charge Current (amps)
CB2.5L-C	2.5	3 <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>4</sub> <sup>1</sup> / <sub>8</sub>	80/70/105		1.7	0.8	-	8.1	.23	0.3
CB2.5L-C-1	2.5	3 <sup>3</sup> / <sub>16</sub> <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>4</sub> <sup>1</sup> / <sub>8</sub>	80/70/105		1.7	0.8	-	8.1	.23	0.3
CB3L-A	3	3 <sup>7</sup> / <sub>8</sub> <sup>1</sup> / <sub>2</sub> <sup>1</sup> / <sub>4</sub> <sup>1</sup> / <sub>8</sub>	98/56/110		2.5	1.1	6	8.1	.23	0.3
CB3L-B	3	3 <sup>7</sup> / <sub>8</sub> <sup>1</sup> / <sub>2</sub> <sup>1</sup> / <sub>4</sub> <sup>1</sup> / <sub>8</sub>	98/56/110		2.5	1.1	6	8.1	.23	0.3
CB4L-A	4	4 <sup>3</sup> / <sub>4</sub> <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>4</sub> <sup>3</sup> / <sub>8</sub>	120/70/92		2.8	1.3	5	10.1	.30	0.4
CB4L-B	4	4 <sup>3</sup> / <sub>4</sub> <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>4</sub> <sup>3</sup> / <sub>8</sub>	120/70/92		2.8	1.3	5	10.1	.30	0.4
CB5L-B	5	4 <sup>3</sup> / <sub>4</sub> <sup>1</sup> / <sub>2</sub> <sup>3</sup> / <sub>8</sub> <sup>1</sup> / <sub>5</sub> <sup>1</sup> / <sub>8</sub>	120/60/130		3.5	1.6	6	12.2	.36	0.5

# BATTERY SPECIFICATIONS

**CB Series** (continued)

**12 VOLT**

Battery Type	Capacity AH (10HR)	Dimensions -Inches- L/W/H	Dimensions -Millimeters- L/W/H	Assembly Figure (As per cover polarity)	Weight Lbs.	Weight Kgs.	Terminal Type- see pg. 4	Acid Volume (Ozs.)	Acid Volume (Liters)	Regular Charge Current (amps)
CB7-A	8	5 <sup>5/16</sup> /3/5 <sup>1/4</sup>	135/75/133		5.1	2.3	6	20.3	0.6	0.8
YB7C-A	8	5 <sup>1/8</sup> /3 <sup>9/16</sup> /4 <sup>1/2</sup>	130/90/114		5.1	2.3	3	20.3	0.6	0.8
CB7L-B	8	5 <sup>5/16</sup> /3/5 <sup>1/4</sup>	135/75/133		5.1	2.3	11	20.3	0.6	0.8
CB9A-A	9	5 <sup>5/16</sup> /3/6 <sup>1/8</sup>	135/75/155		5.3	2.4	6	20.3	0.6	0.9
CB9L-A2	9	5 <sup>5/16</sup> /3/5 <sup>1/2</sup>	135/75/139		5.3	2.4	4	20.3	0.6	0.9
CB9-B	9	5 <sup>5/16</sup> /3/5 <sup>1/2</sup>	135/75/139		5.3	2.4	6	20.3	0.6	0.9
CB9L-B	9	5 <sup>5/16</sup> /3/5 <sup>1/2</sup>	135/75/139		5.3	2.4	6	20.3	0.6	0.9
CB10A-A2	11	5 <sup>5/16</sup> /3 <sup>9/16</sup> /6 <sup>1/8</sup>	135/90/155		7.0	3.2	8	27.0	0.8	1.1
CB10L-A2	11	5 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>3/4</sup>	135/90/145		7.0	3.2	8	27.0	0.8	1.1
CB10L-B	11	5 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>3/4</sup>	135/90/145		7.0	3.2	6	27.0	0.8	1.1
CB10L-B2	11	5 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>3/4</sup>	135/90/145		7.0	3.2	8	27.0	0.8	1.1
CB12A-A <sup>1</sup>	12	5 <sup>5/16</sup> /3 <sup>3/16</sup> /6 <sup>5/16</sup>	134/80/160		6.8	3.1	6	27.0	0.8	1.2
CB12AL-A	12	5 <sup>5/16</sup> /3 <sup>3/16</sup> /6 <sup>5/16</sup>	134/80/160		6.8	3.1	6	25.4	0.8	1.2
CB12B-B2	12	6 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>1/8</sup>	160/90/130		7.1	3.2	8	27.0	0.8	1.2
CB12C-A	12	5 <sup>5/16</sup> /3 <sup>3/16</sup> /6 <sup>7/8</sup>	134/80/175		7.1	3.2	4	27.0	0.8	1.2
CB14-A2	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	8	30.4	0.9	1.4
CB14A-A	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>15/16</sup>	134/89/176		7.9	3.6	6	30.4	0.9	1.4
CB14-A2	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>15/16</sup>	134/89/176		7.9	3.6	8	30.4	0.9	1.4
CB14L-A1	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	1	30.4	0.9	1.4
CB14L-A2	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	8	30.4	0.9	1.4
CB14L-B2	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	8	30.4	0.9	1.4
CB14-B2	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	8	30.4	0.9	1.4
SCB14L-A2 <sup>2</sup>	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	8	30.4	0.9	1.4
SCB14L-B2 <sup>2</sup>	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /6 <sup>9/16</sup>	134/89/166		7.6	3.4	8	30.4	0.9	1.4
CB16AL-A2	16	8 <sup>1/8</sup> /2 <sup>13/16</sup> /6 <sup>7/16</sup>	207/71.5/164		8.6	3.9	2	37.2	1.1	1.6
HCB16A-A	16	6 <sup>3/8</sup> /7 <sup>1/16</sup>	151/91/180		8.5	3.9	7	30.4	0.9	1.6
CB16-B	19	6 <sup>7/8</sup> /4/6 <sup>1/8</sup>	175/100/155		10.5	4.8	6	40.6	1.2	1.9
CB16L-B <sup>1</sup>	19	6 <sup>7/8</sup> /4/6 <sup>1/8</sup>	175/100/155		10.5	4.8	6	40.6	1.2	1.9
CB16CL-B	19	6 <sup>7/8</sup> /4/6 <sup>7/8</sup>	175/100/175		10.1	4.6	4	40.6	1.2	1.9
SCB16L-B <sup>2</sup>	19	6 <sup>15/16</sup> /4/6 <sup>1/8</sup>	175/100/155		9.3	4.2	6	43.9	1.3	1.9
CB18-A	18	7 <sup>1/8</sup> /3 <sup>9/16</sup> /6 <sup>3/8</sup>	180/90/162		9.4	4.3	7	40.6	1.2	1.8
CB18L-A	18	7 <sup>1/8</sup> /3 <sup>9/16</sup> /6 <sup>3/8</sup>	180/90/162		9.4	4.3	7	40.6	1.2	1.8
C50-N18L-A3	20	8 <sup>1/8</sup> /3 <sup>9/16</sup> /6 <sup>3/8</sup>	205/90/162		11.2	5.1	4	47.3	1.4	2.0
C60-N24L-A	28	7 <sup>1/4</sup> /4 <sup>7/8</sup> /6 <sup>7/8</sup>	184/124/175		14.4	6.5	3	57.5	1.7	1.7
CB30L-B	30	6 <sup>5/8</sup> /5 <sup>3/16</sup> /6 <sup>15/16</sup>	168/132/176		14.1	6.4	4	57.5	1.7	3.0





















<sup>1</sup> Sensor available for this battery.

<sup>2</sup> This battery includes a sensor.

# BATTERY SPECIFICATIONS

## Conventional

## 12 VOLT

Battery Type	Capacity AH (10HR)	Dimensions -Inches- L/W/H	Dimensions -Millimeters- L/W/H	Assembly Figure (As per cover polarity)	Weight Lbs.	Weight Kgs.	Terminal Type- see pg. 4	Acid Volume (Ozs.)	Acid Volume (Liters)	Regular Charge Current (amps)
12N5-3B	5	4 <sup>3/4</sup> /2 <sup>3/8</sup> /5 <sup>1/8</sup>	120/60/130		3.1	1.4	6	13.5	0.4	0.5
12N5-4B	5	4 <sup>3/4</sup> /2 <sup>3/8</sup> /5 <sup>1/8</sup>	120/60/130		3.1	1.4	6	13.5	0.4	0.5
12N5.5-3B	5.5	5 <sup>5/16</sup> /2 <sup>3/8</sup> /5 <sup>1/8</sup>	135/60/130		4.3	1.9	6	13.5	0.4	0.6
12N5.5-4A	5.5	5 <sup>5/16</sup> /2 <sup>3/8</sup> /5 <sup>1/8</sup>	135/60/130		4.3	1.9	2	13.5	0.4	0.6
12N5.5A-3B	5.5	4 <sup>1/16</sup> /3 <sup>9/16</sup> /4 <sup>1/2</sup>	103/90/114		4.3	1.9	6	16.9	0.5	0.6
12N7-3B	7	5 <sup>5/16</sup> /3/5 <sup>1/4</sup>	135/75/133		4.9	1.9	6	16.9	0.5	0.7
12N7-4A	7	5 <sup>5/16</sup> /3/5 <sup>1/4</sup>	135/75/133		4.9	1.9	6	16.9	0.5	0.7
12N7-4B	7	5 <sup>5/16</sup> /3/5 <sup>1/4</sup>	135/75/133		4.9	1.9	6	16.9	0.5	0.7
12N7D-3B	7	5 <sup>5/16</sup> /3/5 <sup>15/16</sup>	135/75/150		4.9	1.9	6	20.3	0.6	0.7
12N9-3A-1	9	5 <sup>5/16</sup> /3/5 <sup>1/2</sup>	135/75/139		5.4	2.4	6	20.3	0.6	0.9
12N9-3B	9	5 <sup>5/16</sup> /3/5 <sup>1/2</sup>	135/75/139		5.4	2.4	6	20.3	0.6	0.9
12N9-4B-1	9	5 <sup>5/16</sup> /3/5 <sup>1/2</sup>	135/75/139		5.4	2.4	6	20.3	0.6	0.9
12N10-3A-2	10	5 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>3/4</sup>	135/90/145		5.8	2.6	6	27.0	0.8	1.0
12N10-3B	10	5 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>3/4</sup>	135/90/145		5.8	2.6	6	27.0	0.8	1.0
12N12A-4A-1	12	5 <sup>5/16</sup> /3 <sup>9/16</sup> /5 <sup>3/4</sup>	134/80/160		6.8	3.1	6	23.7	0.7	1.2
12N14-3A	14	5 <sup>5/16</sup> /3 <sup>1/2</sup> /5 <sup>9/16</sup>	134/89/166		7.5	3.4	8	27.0	0.8	1.4
12N16-3B	16	6 <sup>7/8</sup> /4/6 <sup>1/8</sup>	175/100/155		11.8	5.4	6	40.6	1.2	1.6
12N16-4B	16	6 <sup>7/8</sup> /4/6 <sup>1/8</sup>	175/100/155		11.8	5.4	11	40.6	1.2	1.6
12N24-3	24	7 <sup>1/4</sup> /4 <sup>7/8</sup> /6 <sup>7/8</sup>	184/124/175		12.1	5.5	3	40.6	1.2	2.4
CHD4-12	28*	8 <sup>1/8</sup> /5 <sup>1/4</sup> /6 <sup>1/2</sup>	206/133/165		13.3	6.0	9	74.4	2.2	2.8

\*@20 Hour Rate

## 12 VOLT IMPORT SPECIALTY BATTERY SPECIFICATIONS


Yuasa Type	Old Reference Number (Discontinued)	Plates/Cell	Capacity **Ah (5 hr)	Capacity **Ah (20 hr)	Cranking Performance** (Amps 0°F)	Reserve Capacity Minutes (80°F)	Overall Dimensions in Inches			Shipping Weight Dry (lbs.)	Volume of Acid (oz.)	Charging Current (Amp)	See Key for	
							Length	Width	Height				Terminal	Layout
36B20L(S)	40B19L(S)/NS40ZL(S)	9	28	35	275	52	7 3/4	5 1/16	8 15/16	16.5	84.6	3.5	A	2
32A19RT(S)	NX60-N24T(S)	11	24	30	320	42	7 3/8	5	7 3/8	12.4	64.0	3.0	A	1
32A19L	NX60-N24L	11	24	30	320	42	7 3/8	5	7 1/4	11.5	63.5	3.0	C	2
46B24R	NX60	13	36	45	330	75	9 3/8	5 1/16	8 15/16	19.8	109.3	4.5	B	1
46B24L(S)	NS60L(S)	13	36	45	330	75	9 3/8	5 1/16	8 15/16	19.8	109.3	4.5	A	2
36B20L	40B19L/NS40ZL	9	28	35	275	52	7 3/4	5 1/16	8 15/16	14.1	91.7	3.5	B	2
55B24L(S)	NX100S6L(S)	13	36	45	410	70	9 3/8	5 1/16	8 15/16	19.8	109.3	4.5	A	2
115F51	N120	21	96	120	638	240	19 7/8	7 3/16	10 1/8	46.3	317.4	12.0	A	3
145F51	NS150	25	120	150	760	296	19 7/8	7 3/16	10 1/8	56.2	370.3	14.0	A	3

## IMPORT AUTOMOTIVE BATTERY SPECIFICATIONS


Battery Type	Capacity 20 (Ah)	Overall Dimensions in Inches			Dry Weight (lbs.)	**CCA	**RC	
		Length	Width	Height				
NS40Z	32	7.7	5	7.8	8.8	1.6	274	52
NS40ZL	35	7.7	5	7.8	8.8	1.6	274	52
NS40Z(S)	35	7.7	5	7.8	8.8	1.6	274	52
NS40ZL(S)	35	7.7	5	7.8	8.8	1.6	274	52
NS60	45	9.4	5	7.8	8.9	20	325	71
NS60L	45	9.4	5	7.8	8.9	20	325	71
NS60(S)	45	9.4	5	7.8	8.9	20	325	71
NS60L(S)	45	9.4	5	7.8	8.9	20	325	71
N100(S)	100	16	6.8	8.3	9.1	38	512	182
N120(S)	120	19.8	7.1	8.3	9.3	50	638	228
N150(S)	150	19.9	8.7	8.4	9.4	60	754	294
N200(S)	200	20.5	11	8.6	10.6	89	924	421

\*\*Figures are based on JIS/SAG Specifications and are for reference only

## TERMINALS (measurements in inches)

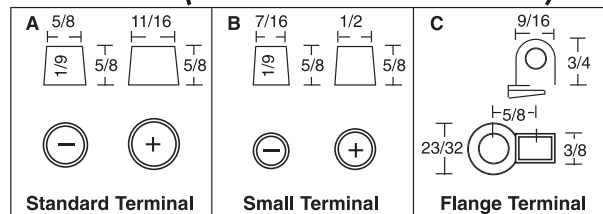

## Battery Layouts

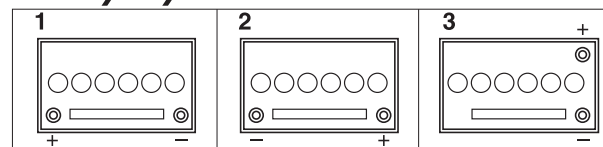

# BATTERY SPECIFICATIONS

**Conventional**

**6 VOLT**

Battery Type	Capacity AH (10HR)	Dimensions -Inches- L/W/H	Dimensions -Millimeters- L/W/H	Assembly Figure (As per cover polarity)	Weight Lbs.	Weight Kgs.	Terminal Type- see pg. 4	Acid Volume (Ozs.)	Acid Volume (Liters)	Regular Charge Current (amps)
6N2-2A	2	2 <sup>3/4</sup> /1 <sup>7/8</sup> /3 <sup>3/4</sup>	70/47/96		1.0	0.5	-	3.4	0.1	0.2
6N2-2A-3	2	2 <sup>3/4</sup> /1 <sup>7/8</sup> /3 <sup>3/4</sup>	70/47/96		1.0	0.5	-	3.4	0.1	0.2
6N2-2A-4	2	2 <sup>3/4</sup> /1 <sup>7/8</sup> /3 <sup>3/4</sup>	70/47/96		1.0	0.5	-	3.4	0.1	0.2
6N2A-2C	2	2 <sup>3/4</sup> /1 <sup>7/8</sup> /4 <sup>3/16</sup>	70/47/106		1.0	0.5	-	3.4	0.1	0.2
6N2A-2C-3	2	2 <sup>3/4</sup> /1 <sup>7/8</sup> /4 <sup>3/16</sup>	70/47/106		1.0	0.5	-	3.4	0.1	0.2
6N4-2A	4	2 <sup>13/16</sup> /2 <sup>13/16</sup> /3 <sup>3/4</sup>	71/71/96		1.3	0.6	-	6.8	0.2	0.4
6N4-2A-3	4	2 <sup>13/16</sup> /2 <sup>13/16</sup> /3 <sup>3/4</sup>	71/71/96		1.3	0.6	-	6.8	0.2	0.4
6N4-2A-4	4	2 <sup>13/16</sup> /2 <sup>13/16</sup> /3 <sup>3/4</sup>	71/71/96		1.3	0.6	-	6.8	0.2	0.4
6N4-2A-5	4	2 <sup>13/16</sup> /2 <sup>13/16</sup> /3 <sup>3/4</sup>	71/71/96		1.3	0.6	-	6.8	0.2	0.4
6N4-2A-8(6)	4	2 <sup>13/16</sup> /2 <sup>13/16</sup> /3 <sup>3/4</sup>	71/71/96		1.3	0.6	-	6.8	0.2	0.4
6N4A-4D	4	2 <sup>3/8</sup> /2 <sup>1/4</sup> /5 <sup>1/8</sup>	61/57/131		1.7	0.8	-	6.8	0.2	0.4
6N4B-2A	4	4/1 <sup>7/8</sup> /3 <sup>3/4</sup>	102/48/96		1.7	0.8	-	6.8	0.2	0.4
6N4B-2A-3	4	4/1 <sup>7/8</sup> /3 <sup>3/4</sup>	102/48/96		1.7	0.8	-	6.8	0.2	0.4
6N4B-2A-5	4	4/1 <sup>7/8</sup> /3 <sup>3/4</sup>	102/48/96		1.7	0.8	-	6.8	0.2	0.4
6N4C-1B	4	2 <sup>13/16</sup> /2 <sup>13/16</sup> /4 <sup>1/8</sup>	71/71/105		1.4	0.6	-	6.8	0.2	0.4
6N5.5-1D	5.5	3 <sup>9/16</sup> /2 <sup>3/4</sup> /3 <sup>15/16</sup>	90/70/100		1.8	0.8	-	10.1	0.3	0.6
6N6-1B	6	3 <sup>7/8</sup> /2 <sup>1/4</sup> /4 <sup>3/8</sup>	99/57/111		2.0	0.9	-	10.1	0.3	0.6
6N6-3B	6	3 <sup>7/8</sup> /2 <sup>1/4</sup> /4 <sup>3/8</sup>	99/57/111		2.0	0.9	6	10.1	0.3	0.6
6N6-33B-1	6	3 <sup>7/8</sup> /2 <sup>1/4</sup> /4 <sup>3/8</sup>	99/57/111		2.0	0.9	6	10.1	0.3	0.6
6N6-1D-2	6	3 <sup>7/8</sup> /2 <sup>1/4</sup> /4 <sup>3/8</sup>	99/57/111		2.0	0.9	-	10.1	0.3	0.6
B39-6	7	4 <sup>15/16</sup> /1 <sup>7/8</sup> /4 <sup>15/16</sup>	126/48/126		2.8	1.3	6	10.1	0.3	0.7
6N8-3B	8	4 <sup>3/4</sup> /2 <sup>3/4</sup> /3 <sup>3/4</sup>	120/70/95		3.0	1.4	6	10.5	0.3	0.8
6N11A-2D	11	5 <sup>7/8</sup> /2 <sup>3/4</sup> /3 <sup>15/16</sup>	150/70/100		3.5	1.6	6	13.5	0.4	1.1
6N11A-1B	11	4 <sup>13/16</sup> /2 <sup>7/16</sup> /5 <sup>1/8</sup>	122/62/131		3.5	1.6	6	13.5	0.4	1.1
6N12A-2D	12	6 <sup>1/8</sup> /2 <sup>1/4</sup> /4 <sup>9/16</sup>	156/57/116		3.8	1.7	6	15.2	0.5	1.2
B38-6A	13	4 <sup>11/16</sup> /3 <sup>1/4</sup> /6 <sup>15/16</sup>	119/83/161		4.7	2.1	6	21.0	0.6	1.3