FLTX4L/5L - FLTZ5S/6S
Datasheet

FULBAT® MOTORCYCLE BATTERY



LiFePO4

NON-SPILLABLE

BMS INTEGRATED

The new Lithium range is designed to offer the ultimate riding experience.
Ready to use and with ultra-light weight conception, this LiFePO4 range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.

FEATURES

- Ready to use & Maintenance Free
- Ultra lightweight compare to lead acid battery
- Very high cold cranking performance
- Ultra safe thanks to the integrated BMS
- Very fast recharge
- Multi-positional fitment
- Integrated LCD battery tester
- Very low self-discharge

BATTERY REPLACEMENT

- FB4L-B
- FTX4L-BS/FTZ5S
- FTX5L-BS/FTZ6S

TERMINAL

Front Side Top 3D




SPECIFICATIONS

Voltage	Capacity	CCA (EN)
12.8V	2.0Ah	120A
Energy	**Charging current std.**	**Charging current max**
25.6Wh	1.0A	2.0A


BMS FUNCTION:
- Over discharge protection
- Over charge protection
- Cell equalization

DIMENSIONS & WEIGHT


Length	113±2mm
Width	70±2mm
Total Height	85±2mm
Gross weight	0.60kg

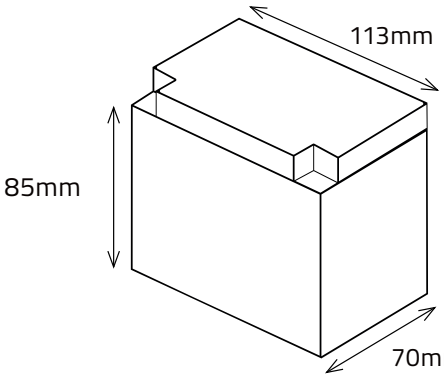


INCLUDED:
1x spacer 20mm



POLARITY



MOUNTING ANGLES



APPLICATIONS

